


TECHNICAL DATA | EF REDUCING TEE

- Standards: AS/NZS 4129 | SDR11 | SDR17
 Size Range: 32 x 20 mm - 180 x 125 mm
 Materials: Polyethylene (PE) 100
 Pressure Rating: PN16, Water | PN10, Gas
 Fitting Details:
 - Injected
 - 4mm pin connectors



d1 mm	d2 mm	D mm	Z mm	L mm	le1 mm	le2 mm	Weight kg	Compatibility SDR	Code
32	20	44	98	88	35	44	0.13	11	EFTR3220
32	25	44	98	88	35	44	0.133	11	EFTR3225
50	40	64	138	89	43	49	0.205	9, 11	EFTR5040
63	32	80	164	92	49	44	0.330	9, 11	EFTR6332
63	40	80	164	98	49	49	0.340	9, 11	EFTR6340
63	50	80	164	105	49	55	0.345	9, 11	EFTR6350
90	63	117	117	132	65	63	0.870	9, 11	EFTR9063
110	63	138	260	149	72	63	1.510	9, 17	EFTR11063
110	90	138	260	165	72	79	1.620	9, 17	EFTR11090
125	90	158	268	172	77	79	2.090	9, 17	EFTR12590
160	90	204	320	191	86	79	3.315	9, 17	EFTR16090
160	110	204	320	191	86	82	3.455	9, 17	EFTR160110
180	125	228	340	207	88	87	5.000	9, 17	EFTR180125

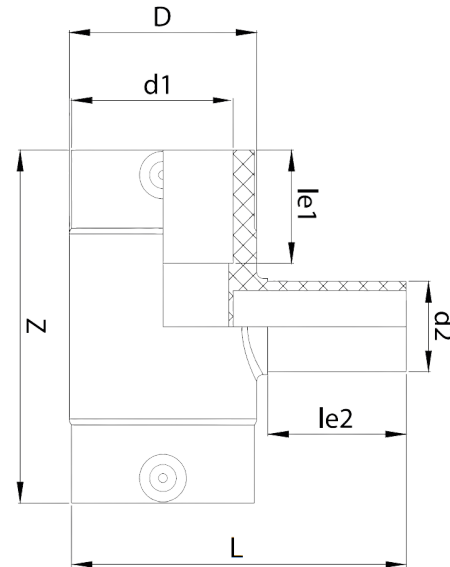

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and SDR ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
 13 Vision Court, Noosaville, QLD, 4566
 42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
 T: +61 3 9037 4755 (Vic)
 E: sales@fusionqld.com.au
 W: fusionqld.com.au

TECHNICAL DATA | EF REDUCING TEE

Standards: AS/NZS 4129 | SDR11 | SDR17

Size Range: 200 x 90 mm - 250 x 160 mm


Materials: Polyethelyne (PE) 100

Pressure Rating: PN16, Water | PN10, Gas

- Fitting Details:
- Injected
 - 4mm pin connectors
 - Limited path fusion indicators
 - 2 separate fusion zones



d mm	d2 mm	d1 mm	L mm	L1 mm	z mm	z1 mm	H mm	Weight kg	SDR	Code
200	90	250	595	104	194	216	81	9.012	11 - 26	EFTR20090
200	110	250	600	104	194	219	84	12.400	11 - 26	EFTR200110
200	160	250	595	104	194	237	101	12.400	11 - 26	EFTR200160
225	90	280	666	112	217	228	80	13.100	11 - 26	EFTR22590
225	110	280	670	112	217	238	85	13.100	11 - 26	EFTR225110
225	160	280	667	112	217	258	105	13.600	11 - 26	EFTR225160
250	110	310	709	123	220	284	85	11.660	11 - 26	EFTR250110
250	160	310	711	123	220	266	101	17.070	11 - 26	EFTR250160

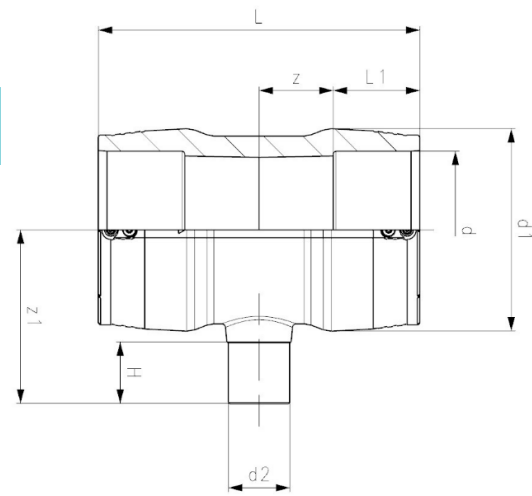

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and SDR ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
13 Vision Court, Noosaville, QLD, 4566
42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au