

TECHNICAL DATA | STUB FLANGE SHORT SDR11

Standards: AS/NZS 4129 | SDR11

Size Range: 110 mm - 1000 mm


Materials: Polyethelyne (PE) 100

Pressure Rating: PN16, Water | 10 BAR, Gas

Fitting Details: Injected



d mm	d1 mm	d2 mm	d3 mm	le mm	L mm	Z mm	s mm	Code
110	103	128	89.4	22	20	60	10	BWSF11110
125	124	160	101.5	22	20	60	11.4	BWSF11125
140	128	192	113.9	23	25	65	12.7	BWSF11140
160	168	217	130	23	25	65	14.6	BWSF11160
180	180	217	146.3	23	25	65	16.4	BWSF11180
200	225	270	162.5	23.5	30	75	18.2	BWSF11200
225	230	270	182.9	24	30	80	20.5	BWSF11225
250	276.4	334	203.4	24.15	35	80	22.7	BWSF11250
280	290	334	227.8	25.33	35	85	25.4	BWSF11280
315	330	380	256.3	28.84	40	90	28.6	BWSF11315
355	364.1	444	288.8	30.44	40	100	32.2	BWSF11355
400	417.4	495	325.4	27.08	40	100	36.3	BWSF11400
450	470	545	366.1	30	60	110	40.9	BWSF11450
500	520	596	406.8	30	60	125	45.4	BWSF11500
560	582	657	455.8	30	60	130	50.7	BWSF11560
630	640	710	512.6	30	60	130	57.2	BWSF11630
710	735	800	577.6	30	60	130	64.5	BWSF11710
800	840	904	651.1	30	92	162	72.5	BWSF11800
900	944	1000	732.4	23	93	170	81.7	BWSF11900
1000	1052	1105	814.9	30	113	183	90.3	BWSF111000

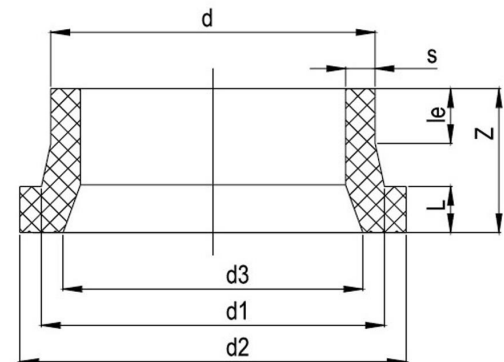

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and SDR ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
13 Vision Court, Noosaville, QLD, 4566
42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au