

TECHNICAL DATA | STUB FLANGE SHORT SDR17

Standards: AS/NZS 4129 | SDR17

Size Range: 90 mm - 1000 mm


Materials: Polyethelyne (PE) 100

Pressure Rating: SDR17: PN10, Water | 5 BAR, Gas

Fitting Details: Injection moulded



d mm	d1 mm	d2 mm	d3 mm	le mm	L mm	Z mm	s mm	Code
90	103	128	78	22	20	60	5.4	BWSF1790
110	124	160	96	22	20	60	6.6	BWSF17110
125	128	192	110	23	25	65	7.4	BWSF17125
160	168	217	140	23	25	65	9.5	BWSF17160
180	180	217	158	23	25	65	10.7	BWSF17180
200	225	270	175	23.5	30	75	11.9	BWSF17200
225	230	270	198	24	30	80	13.4	BWSF17225
250	276.5	334	219	24.15	35	80	14.8	BWSF17250
280	290	334	246	25.33	35	85	16.4	BWSF17280
315	330	380	278	28.84	40	90	18.7	BWSF17315
355	364.1	444	311	30.44	40	100	21.1	BWSF17355
400	417.4	495	351	27.08	40	100	23.7	BWSF17400
450	470	545	395	30	60	110	26.7	BWSF17450
500	520	596	440	30	60	125	29.6	BWSF17500
560	582	657	494	30	60	130	33.2	BWSF17560
630	640	710	554	30	60	130	37.3	BWSF17630
710	735	800	624	30	60	130	42.1	BWSF17710
800	840	904	704	30	92	162	47.4	BWSF17800
900	944	1000	791	23	93	170	53.5	BWSF17900
1000	1052	1105	880	30	113	183	59.3	BWSF171000

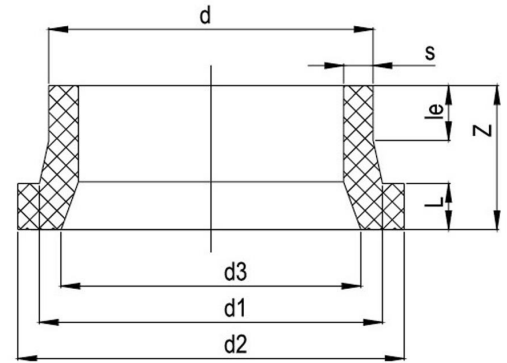

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and SDR ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
13 Vision Court, Noosaville, QLD, 4566
42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au