

TECHNICAL DATA | CAT 19 uPVC TEE


Standards: Compatible with AS/NZS 1477 Pressure Pipe and AS/NZS 4765 Pressure Pipe Applications

Size Range: 200 mm - 300 mm

Materials: uPVC

Pressure Rating: PN 6, PN 12, PN16



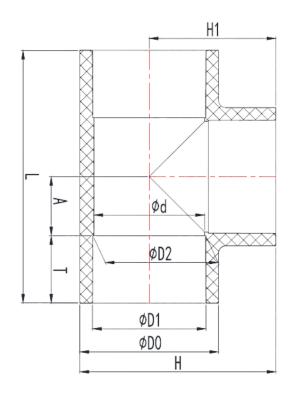

Size mm	D0 mm	D1 mm	D2 mm	d	т	L.	Н1	н	Pressure Rating	Code
200	254.6	226.2	224.9	216.9	119.1	463.5	233.5	360.8	PN12	TT200
225	287.9	251.3	249.9	241.9	131.65	516	258.5	402.45	PN16	TT225
250	314.8	281.5	279.9	278	147	581.5	291	448.4	PN16	TT250
300	358.2	316.7	314.9	306.9	164.3	645	323	502.1	PN6	TT300
375	442	402	400	369.8	204.2	825	413	634	PN6	TT375

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and SDR ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.