


TECHNICAL DATA | uPVC VAN STONE FLANGE

Standards: Compatible with AS/NZS 1477 Pressure Pipe and AS/NZS 4765 Pressure Pipe Applications

Size Range: 200 mm - 375 mm

uPVC Materials: Pressure Rating: PN 9



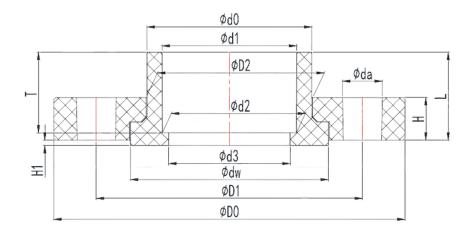

Size mm	D0 mm	D1 mm	D2 mm	d0	d1	d2	d3	dw	da	Т	Н1	Н	L	Code
150	285	240	186.3	184.3	160.8	159.9	151	204	22	86.2	3	32	92.2	TFLR150G
200	340	295	256.1	254.1	226.2	224.9	216	271	22	119.1	3	38	127.7	TFLR200
225	395	350	283.3	281.3	251.3	249.9	239.5	310	22	131.65	3.5	40	138.2	TFLR225
250	398	351.5	308	305.5	281.5	280.15	272	325	22	147	10	35	159	TFLR250
300	445	400	356.6	354.6	316.7	314.9	302	373	22	167.7	5	44	175.7	TFLR300
375	570	500	444	442	402	400	369.8	453	24	204.2	40	44	226	TFLR375

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and SDR ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

T: +61 7 5474 3000 (Qld) T: +61 3 9037 4755 (Vic) E: sales@fusiongld.com.au

W: fusionqld.com.au