




TECHNICAL DATA | SPRING CHECK VALVE THREADED

Standards: Compatible with AS/NZS 1477 Pressure Pipe Applications

Size Range: 20mm - 50mm

Materials: 1. Body: uPVC
2. O-Ring: EPDM
3. Spring: Steel
4. Thread: uPVC

Fitting Details: BSP Threaded

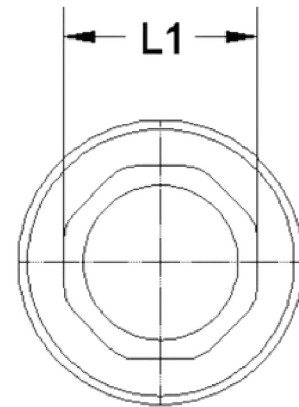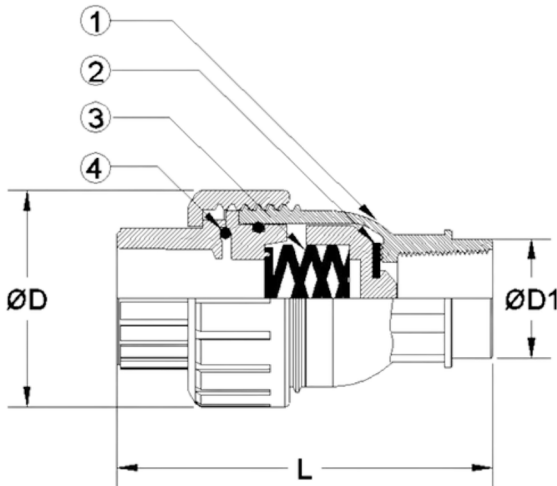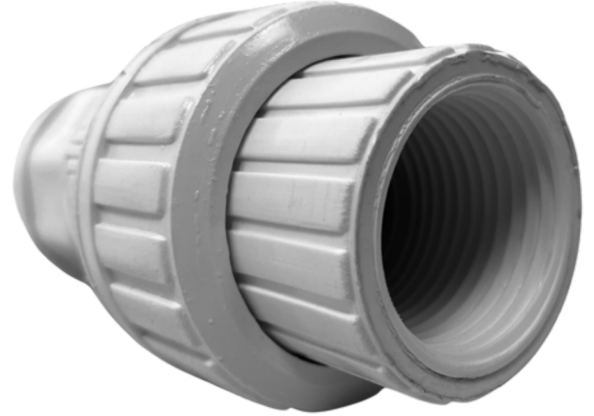

Size mm	Thread Size (D1) inch	D mm	L mm	L1 mm	Code
20	3/4"	58	100	34	TSCVT20
25	1"	58	106.5	40	TSCVT25
40	1 1/2"	102	164	55	TSCVT40
50	2"	102	170	68	TSCVT50

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and PSI ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
13 Vision Court, Noosaville, QLD, 4566
42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au

TECHNICAL DATA | SPRING CHECK VALVE SOLVENT WELD



Standards: Compatible with AS/NZS 1477 Pressure Pipe Applications

Size Range: 20mm - 50mm

Materials:

1. Body: uPVC
2. O-Ring: EPDM
3. Spring: Steel
4. Interior: uPVC

Fitting Details: Solvent Weld

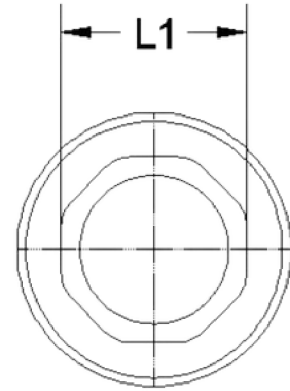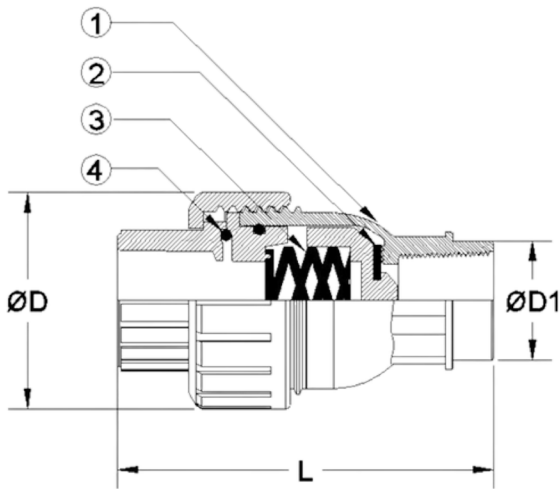

Size mm	D1 mm	D mm	L mm	L1 mm	Code
20	32	58	100	34	TSCVS20
25	39	58	106.5	40	TSCVS25
40	56	102	164	55	TSCVS40
50	69	102	170	68	TSCVS50

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and PSI ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
13 Vision Court, Noosaville, QLD, 4566
42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au