

## TECHNICAL DATA | uPVC BALL VALVE - DOUBLE UNION PN16


Standards: Compatible with AS/NZS 1477 Pressure Pipe Applications

Size Range: 15mm - 100mm

Materials: uPVC

Pressure Rating: PN16

Fitting Details: Solvent Weld

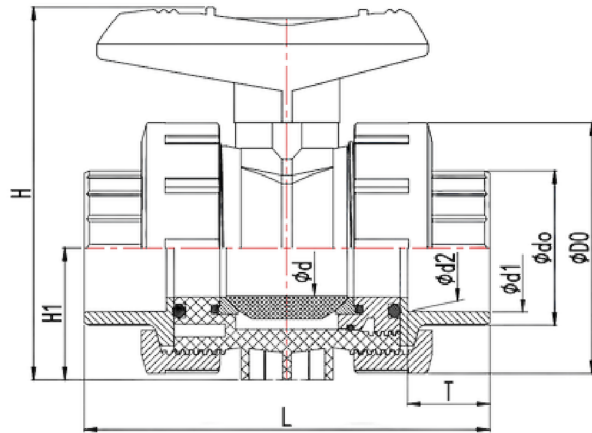

Size mm	D0 mm	d0 mm	d1 mm	d2 mm	d mm	T mm	H1 mm	H mm	L mm	Code
15	51.5	27.4	20.3	19.95	15.5	17	26.3	82.8	95.5	STBVDUS1516
20	59	32.7	25.3	24.95	20.5	19.5	30.6	92.8	109.1	STBVDUS2016
25	70	41.3	32.3	31.9	26	23	39.1	109.2	122.6	STBVDUS2516
32	85.4	49.6	40.35	39.9	33	27	44.2	131.8	147.3	STBVDUS3216
40	98.9	60.20	50.35	49.9	39	32	52.2	143.2	158.8	STBVDUS4016
50	122.2	76	63.4	62.9	51	38.5	71.3	175.7	182.8	STBVDUS5016
65	158.6	89.6	75.4	74.9	64	44.5	82.8	231.5	234	STBVDUS6516
80	192.1	105.4	90.5	89.9	81	52	99.3	260.6	255	STBVDUS8016
100	223.6	128.4	114.3	109.9	99	62	115.2	292.1	297	STBVDUS10016

**Note:**

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and PSI ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

**FUSION QLD PTY LTD**

ABN: 42 987 067 369  
13 Vision Court, Noosaville, QLD, 4566  
42-44 South Link, Dandenong, VIC, 3175

**CONTACT**

T: +61 7 5474 3000 (Qld)  
T: +61 3 9037 4755 (Vic)  
E: sales@fusionqld.com.au  
W: fusionqld.com.au