


TECHNICAL DATA | uPVC FOOT VALVE THREADED

- Standards: Compatible with AS/NZS 1477 Pressure Pipe Applications
- Size Range: 20mm - 150mm
- Materials: Body: uPVC
Ball: uPVC
O-Ring: EPDM
- Fitting Details: BSP Threaded
- Colour: White & Grey

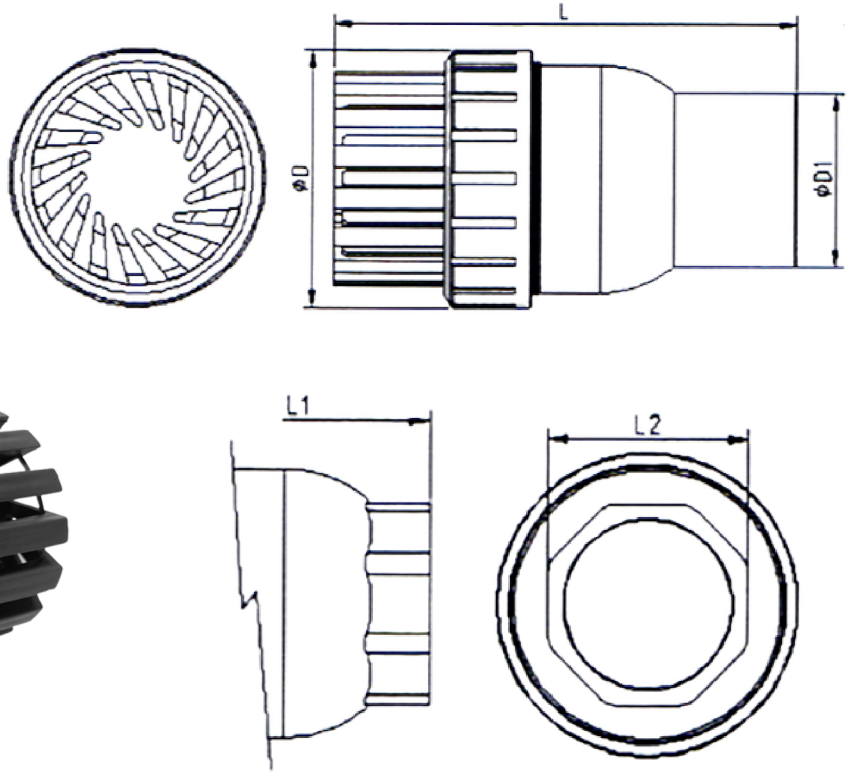

Size mm	Thread Size (D1) inch	D mm	L mm	L1 mm	L2 mm	Code
20	3/4"	58	162.5	94	34	TFVT20
25	1"	58	112.5	96	41	TFVT25
40	1 1/2"	101	164	162.5	56	TFVT40
50	2"	123.6	208	202	69	TFVT50
65	2 1/2"	123.6	200	199	85	TFVT65
80	3"	150.5	231.5	231.5	100	TFVT80
100	4"	175.6	257	257	127	TFVT100

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and PSI ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
13 Vision Court, Noosaville, QLD, 4566
42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au

TECHNICAL DATA | uPVC FOOT VALVE SOLVENT WELD

Standards: Compatible with AS/NZS 1477 Pressure Pipe Applications


Size Range: 20mm - 150mm

Materials: Body: uPVC
Ball: uPVC
O-Ring: EPDM

Fitting Details: Solvent Weld

Colour: Grey

Pressure Rating: PN6

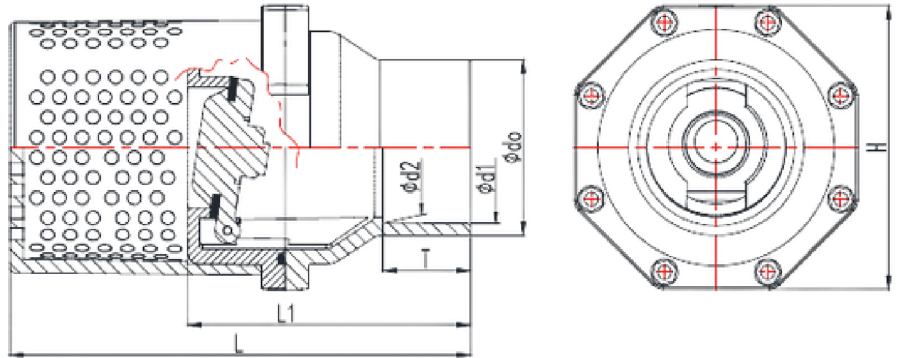

Size mm	d0 mm	d1 mm	d2 mm	T mm	L1 mm	L mm	H mm	Code
100	125.4	114.8	114	61.2	218	379	206	TFVS100
150	186	160.8	159.9	87	304.5	505.8	285	TFVS150

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and PSI ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
13 Vision Court, Noosaville, QLD, 4566
42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au