
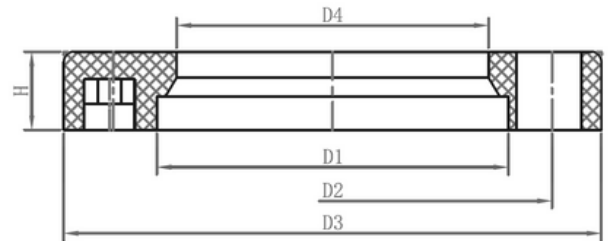


TECHNICAL DATA | uPVC VAN STONE FLANGE

Size Range: 80mm - 150mm

Materials: uPVC

Pressure Rating: PN15

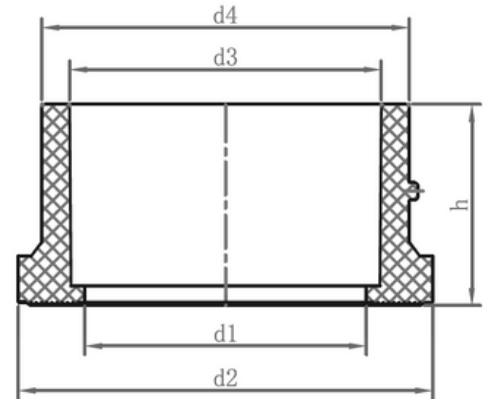

Size mm	d1 mm	d2 mm	d3 mm	d4 mm	h mm	D1 mm	D2 mm	D3 mm	D4 mm	H mm	Code
80	80.8	118.8	89.4	105.4	57.6	121	151	185	107.4	27	TFLR080
100	107	151	115	135.6	69	153	183	230	137.6	30	TFLR100
150	155	208	161	190	97	209.8	239.3	292.8	192	32	TFLR150

The technical data within is not binding. It neither constitutes warranted characteristics nor guaranteed properties or durability. It is the responsibility of the licensed installer to check the PN ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed. The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
13 Vision Court, Noosaville, QLD, 4566
42-44 South Link, Dandenong, VIC, 3175

CONTACT


T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au

TECHNICAL DATA | uPVC VAN STONE FLANGE

Size Range: 15mm - 125mm

Materials: uPVC

Pressure Rating: 15mm - 50mm PN18, 65mm and 125mm PN15

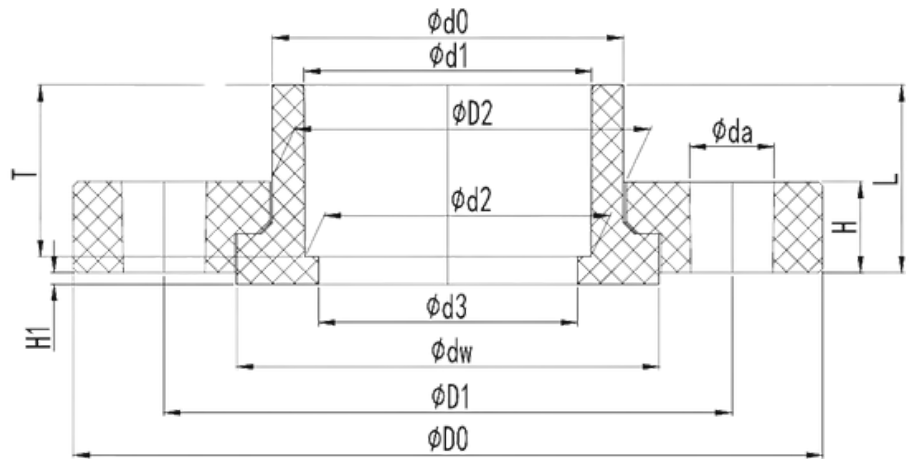

Size mm	D0 mm	D1 mm	D2 mm	d0 mm	d1 mm	d2 mm	d3 mm	dw mm	da mm	T mm	H1 mm	H mm	L mm	Code
15	89	61	31	30.5	21.54	21.23	16	37.6	16	23.22	2.5	13	24.72	TFLR015
20	98	70	37.9	36.9	26.87	26.57	20.6	47	16	26.4	2.5	14	27.9	TFLR020
25	108	79	45.7	44.7	33.66	33.27	27	56	16	29.58	2.5	15	31.08	TFLR025
32	117	89	55	54	42.42	42.04	36	64	16	32.75	2.5	15	35.25	TFLR032
40	127	98	62.6	61.6	50.46	50.46	45	72.4	16	35.93	2.5	18	38.43	TFLR040
50	152	121	74.1	73.1	60.63	60.17	52.5	88.5	19	39.1	2.5	20	42.6	TLFR050
65	185	145	91.40	90.40	75.40	74.90	69	110	18	43.7	2.5	23	47.2	TFLR065
125	250	210	162.3	161.3	140.75	139.9	131.5	181	18	76.2	2.5	30	81.7	TFLR125

The technical data within is not binding. It neither constitutes warranted characteristics nor guaranteed properties or durability. It is the responsibility of the licensed installer to check the PN ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed. The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
13 Vision Court, Noosaville, QLD, 4566
42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au