

LONG SPIGOT FITTINGS SDR11 | SDR17 | AS/NZS 4129

TECHNICAL DATA | TEE LONG SDR17


Standards:	AS/NZS 4129 SDR17
Size Range:	63mm - 400mm
Materials:	Polyethelyne (PE) 100
Pressure Rating:	PN10, Water 5 BAR, Gas

Injected

Fitting Details:

	0	2				
d mm	L mm	le mm	Z mm	s mm	Weight kg	Code
63	225	66	114	3.8	0.260	BWTL1763
75	261	70	130	4.5	0.435	BWTL1775
90	290	83	142	5.4	0.690	BWTL1790
110	327	87	162	6.6	1.120	BWTL17110
125	356	92	178	7.4	1.610	BWTL17125
140	378	97	189	8.3	1.970	BWTL17140
160	417	103	208	9.5	3.090	BWTL17160
180	458	110	225	10.7	4.090	BWTL17180
200	481	117	236	11.9	5.280	BWTL17200
225	527	125	260	13.4	7.450	BWTL17225
250	590	135	292	14.8	9.930	BWTL17250
280	690	146	340	16.6	15.490	BWTL17280
315	712	158	352	18.7	18.830	BWTL17315
355	789	173	394	21.1	29.000	BWTL17355
400	877	189	439	23.7	40.340	BWTL17400



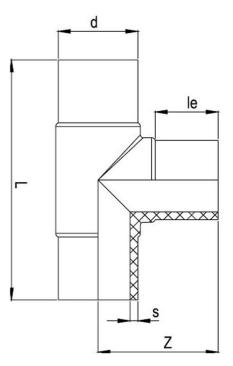

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and SDR ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369 13 Vision Court, Noosaville, QLD, 4566 42-44 South Link, Dandenong, VIC, 3175

CONTACT T: +61 7 5474 3000 (Qld) T: +61 3 9037 4755 (Vic)

T: +61 3 9037 4755 (Vic) E: sales@fusionqld.com.au W: fusionqld.com.au