


TECHNICAL DATA | GALVANISED STEEL BACKING RING TABLE D/E

Standards: AS2129 | AS4087

Size Range: 20mm - 900mm

Materials: Galvanised Steel

Pressure Rating: PN16

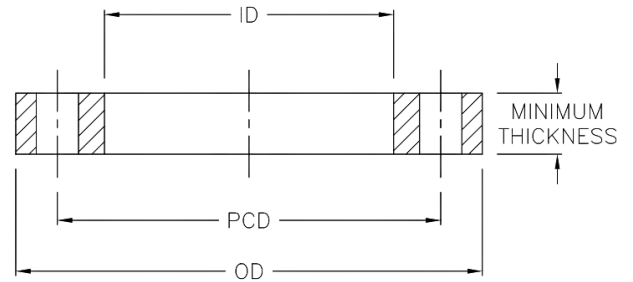

Nominal Pipe OD mm	OD mm	ID mm	Thickness mm	PCD mm	Bolt Hole No. x Dia	Bolt Size mm	Standard	Code
20	95	28	6	67	4 x 14	M12	AS2129	BWBRDE20
25	100	34	6	73	4 x 14	M12	AS2129	BWBRDE25
32	115	43	7	83	4 x 14	M12	AS2129	BWBRDE32
40	120	51	8	87	4 x 14	M12	AS2129	BWBRDE40
50	135	62	9	98	4 x 14	M12	AS2129	BWBRDE50
63	150	78	11	114	4 x 18	M16	AS4087	BWBRDE63
75	165	92	11	127	4 x 18	M16	AS4087	BWBRDE75
90	185	108	11	146	4 x 18	M16	AS4087	BWBRDE90
125	255	140	14	210	8 x 18	M16	AS2129	BWBRDE125
140	255	158	14	210	8 x 18	M16	AS2129	BWBRDE140
355	525	376	30	470	12 x 26	M24	AS4087	BWBRDE355
400	580	430	32	521	12 x 26	M24	AS4087	BWBRDE400
500	705	533	38	641	16 x 26	M24	AS4087	BWBRDE500
800	1060	843	56	984	20 x 36	M33	AS4087	BWBRDE800
900	1175	947	66	1092	24 x 36	M33	AS4087	BWBRDE900

Note:

Installation should always be performed by a licensed operator. As the thicknesses of these flanges differ, it is the responsibility of the licensed installer to check the pressure rating of the flange to be installed, is suitable for the system which it is being used on. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
13 Vision Court, Noosaville, QLD, 4566
42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au