


TECHNICAL DATA | 45° ELBOW LONG SDR11

Standards: AS/NZS 4129 | SDR11
 Size Range: 20mm - 400mm
 Materials: Polyethelyne (PE) 100
 Pressure Rating: PN16, Water | 10 BAR, Gas
 Fitting Details: Injected



d mm	le mm	Z mm	s mm	Weight kg	Code
20	43	119	3.0	0.030	BWEL114520
25	43	125	3.0	0.040	BWEL114525
32	46	136	3.0	0.060	BWEL114532
40	52	145	3.7	0.085	BWEL114540
50	56	153	4.6	0.140	BWEL114550
63	67	160	5.8	0.230	BWEL114563
75	72	176	6.8	0.330	BWEL114575
90	83	202	8.2	0.580	BWEL114590
110	87	220	10	0.980	BWEL1145110
125	92	239	11.4	1.300	BWEL1145125
140	97	250	12.7	1.700	BWEL1145140
160	103	273	14.6	2.435	BWEL1145160
180	110	290	16.4	2.330	BWEL1145180
200	117	311	18.2	4.430	BWEL1145200
225	122	341	20.5	6.200	BWEL1145225
250	135	368	22.7	8.180	BWEL1145250
280	146	406	25.4	11.315	BWEL1145280
315	158	430	28.6	14.600	BWEL1145315
355	173	490	32.3	22.935	BWEL1145355
400	189	548	36.4	31.100	BWEL1145400

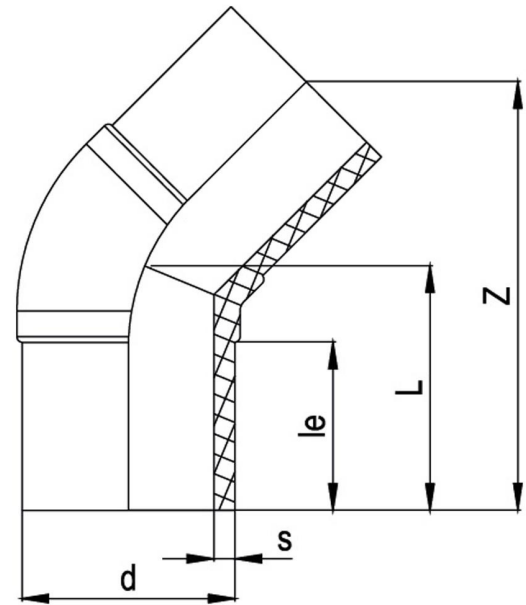

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and SDR ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
 13 Vision Court, Noosaville, QLD, 4566
 42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
 T: +61 3 9037 4755 (Vic)
 E: sales@fusionqld.com.au
 W: fusionqld.com.au