

## TECHNICAL DATA | END CAP LONG SDR11

Standards: AS/NZS 4129 | SDR11

Size Range: 20mm - 400mm


Materials: Polyethylene (PE) 100

Pressure Rating: PN16, Water | 10 BAR, Gas

Fitting Details: Injected



d mm	le mm	s mm	Weight kg	Code
20	42	3.0	0.010	BWCAPL1120
25	43	3.0	0.010	BWCAPL1125
32	46	3.0	0.020	BWCAPL1132
40	52	3.7	0.040	BWCAPL1140
50	58	4.6	0.050	BWCAPL1150
63	67	5.8	0.090	BWCAPL1163
75	72	6.8	0.140	BWCAPL1175
90	83	8.2	0.230	BWCAPL1190
110	85	10	0.350	BWCAPL11110
125	88	11.4	0.550	BWCAPL11125
140	98	12.7	0.760	BWCAPL11140
160	103	14.6	1.040	BWCAPL11160
180	110	16.4	1.400	BWCAPL11180
200	117	18.2	1.890	BWCAPL11200
225	125	20.5	2.600	BWCAPL11225
250	135	22.7	3.290	BWCAPL11250
280	146	25.4	4.630	BWCAPL11280
315	158	28.6	6.120	BWCAPL11315
355	173	32.3	8.980	BWCAPL11355
400	189	36.4	12.590	BWCAPL11400

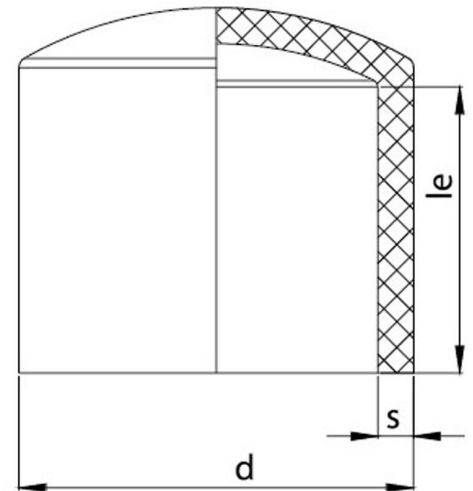

**Note:**

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and SDR ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

**FUSION QLD PTY LTD**

ABN: 42 987 067 369  
13 Vision Court, Noosaville, QLD, 4566  
42-44 South Link, Dandenong, VIC, 3175

**CONTACT**

T: +61 7 5474 3000 (Qld)  
T: +61 3 9037 4755 (Vic)  
E: sales@fusionqld.com.au  
W: fusionqld.com.au