


TECHNICAL DATA | REDUCING TEE

Standards: ASTM D2467

Size Range: 3/4" x 1/2" - 12" x 10"

Materials: uPVC

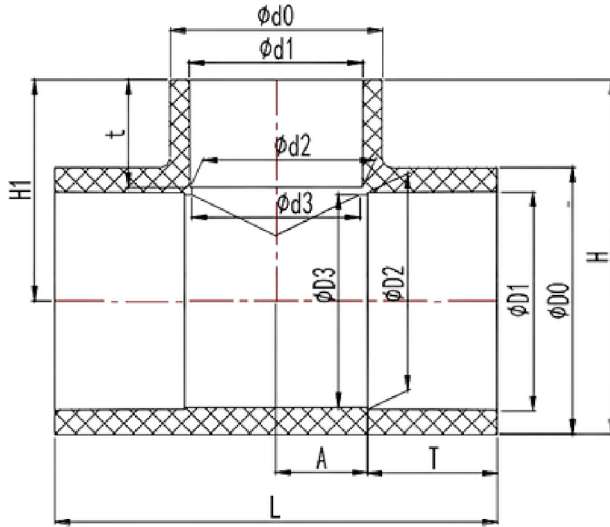

Size inch	D0 mm	D1 mm	D2 mm	D3 mm	d0 mm	d1 mm	d2 mm	d3 mm	t mm	T mm	H mm	L mm	Code
3/4" x 1/2"	35.87	26.87	26.57	22.5	30.14	21.54	21.23	17	23.22	26.4	38.55	82.8	STTR2015
1" x 1/2"	44.3	33.66	33.27	29	30.14	21.54	21.23	17	23.22	29.57	41.75	94.2	STTR2515
1" x 3/4"	44.3	33.66	33.27	29	35.87	26.87	26.57	22.5	26.4	29.57	44.6	94.2	STTR2520
1 1/4" x 3/4"	53.42	42.42	42.04	38	35.87	26.87	26.57	22.5	26.4	32.75	49.1	111.5	STTR3215
1 1/4" x 1"	53.42	42.42	42.04	38	44.30	33.66	33.27	29	29.57	32.75	51.6	111.5	STTR3220
1 1/2" x 1"	60.4	48.56	48.11	43	44.30	33.66	33.27	29	29.57	35.93	54.35	124	STTR3225
1 1/2" x 1 1/4"	60.4	48.56	48.11	43	53.42	42.42	42.04	38	32.75	35.93	58.5	124	STTR4015
2" x 1 1/4"	73.1	60.63	60.17	55	53.42	42.42	42.04	38	32.75	39.1	64	141.7	STTR4020
2" x 1 1/2"	73.1	60.63	60.17	55	60.4	48.56	48.11	43	35.93	39.1	67.45	141.7	STTR4025
2 1/2" x 1 1/2"	88.4	73.38	72.85	67.5	60.4	48.56	48.11	43	35.93	45.45	73.7	169	STTR4032
2 1/2" x 2"	88.4	73.38	72.85	67.5	73.1	60.63	60.17	55	39.1	45.45	77.1	169	STTR5020

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
13 Vision Court, Noosaville, QLD, 4566
42-44 South Link, Dandenong, VIC, 3175

CONTACT


T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au

TECHNICAL DATA | REDUCING TEE

Standards: ASTM D2467

Size Range: 3/4" x 1/2" - 12" x 10"

Materials: uPVC

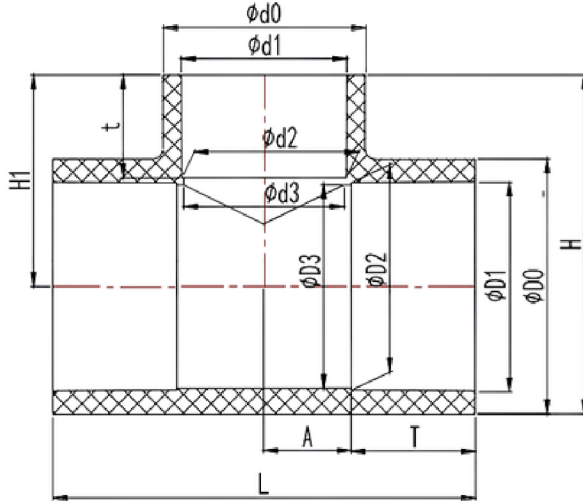

Size inch	D0 mm	D1 mm	D2 mm	D3 mm	d0 mm	d1 mm	d2 mm	d3 mm	t mm	T mm	H mm	L mm	Code
3" x 2"	105.7	89.31	88.7	83	73.1	60.63	60.17	55	39.1	48.63	84.6	194.15	STTR8050
3" x 2½"	105.7	89.31	88.7	83	88.4	73.38	72.85	67.5	45.45	48.63	92	194.15	STTR8065
4" x 2½"	132.5	114.76	114.07	106	88.4	73.38	72.85	67.5	45.45	58.15	103	234.5	STTR10050
4" x 3"	132.5	114.76	114.07	106	105.7	89.31	88.7	83	48.63	58.15	107.65	234.5	STTR10080
6" x 2"	192	168.83	168	160	73.1	60.63	60.17	55	39.1	77.2	224.9	332.5	STTR15050
6" x 4"	192	168.83	168	160	132.5	114.76	114.07	106	58.15	77.2	240.3	332.5	STTR150100
8" x 4"	246.5	219.84	218.69	208	132.5	114.76	114.07	106	58.15	102.6	286	435.5	STTR200100
8" x 6"	246.5	219.84	218.69	208	192	168.83	168	160	77.2	102.6	313.5	435.2	STTR200150
10" x 6"	305.8	273.81	272.67	262.5	192	168.83	168	160	77.2	128	370.4	446.6	STTR250150
10" x 8"	305.8	273.81	272.67	262.5	246.5	219.84	218.69	208	102.6	128	297.9	496.5	STTR250200
12" x 8"	361.6	324.6	323.47	313	246.5	219.84	218.69	208	102.6	153.4	450.1	583	STTR300200
12" x 10"	361.6	324.6	323.47	313	305.8	273.81	272.67	262.5	128	153.4	477.6	656.8	STTR300250

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
13 Vision Court, Noosaville, QLD, 4566
42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au