


TECHNICAL DATA | uPVC VAN STONE FLANGE | MULTIDRILLED

Standards: AS/NZS 1477 | Watermark

Size Range: 80mm - 150mm

Materials: uPVC

Pressure Rating: PN12 - PN18

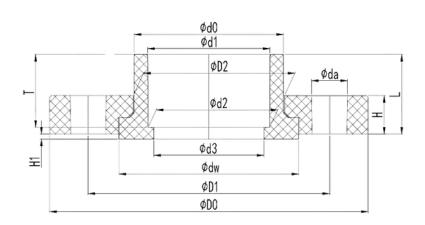



Size mm	D0 mm	D1 mm	D2 mm	d0 mm	d1 mm	d2 mm	d3 mm	dw mm	da mm	T mm	H mm	L mm	PN	Code
80	185.4	146	104.9	104.8	89.3	89.3	81.5	118.3	18	48.8	27	54.2	18	TFLR80T
100	229.9	178	131.9	131.8	114.4	114.4	104.6	150.7	18	58.6	29.6	64.7	18	TFLR100T
125	260.6	210	161.6	161.6	140.6	140.6	130.1	181.7	22	70.3	28.9	81.1	15	TFLR125T
150	292.8	235	191.2	191.4	160.6	160.6	156.2	207.6	22	78.1	32.6	87.5	12	TFLR150T

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

ABN: 42 987 067 369 13 Vision Court, Noosaville, QLD, 4566 42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au